

# CHESTNUT OAK LOG PLACEMENT INSTRUCTIONS

**CAUTION.....WARNING.....IMPORTANT**

**USE ONLY PETERSON REAL FYRE BURNERS AND VALVES WITH THIS REAL FYRE LOG SET.**



**CN-24 shown**



## LOG SET IMPORTANT INFORMATION

This instruction contains recommended log placement for these Real Fyre logs which will promote good combustion and provide superior flame pattern and appearance. **Use these logs only with a Peterson burner system.**

**Adequate ventilation is absolutely necessary!** Provided significant, noticeable sooting **does not** occur, some flexibility is possible in log placement to suit your individual preference (see Important below). If you experience a continued accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you should move the effected log(s) so as to minimize the flame contact on the effected log(s). If significant sooting continues, stop using this gas log set.

Please read these instructions completely and carefully.

**Important:** Adequate ventilation is absolutely necessary. Adequate spacing between the logs is **NECESSARY** and **MUST** be maintained. Some carbon build up (sooting) may occur where flames strike the logs. If carbon build up (sooting) continues, rearrange top logs to allow more opening(s) for flame(s) before sooting becomes worse. **If any sooting occurs outside of the firebox (i.e. on the walls), turn off unit immediately and contact a qualified professional service technician.**

**WARNING:** Use **ONLY** Peterson Real Fyre burners and valves with this Real Fyre gas log set. **Failure to do so may result in property damage or personal injury, and will void listings, certifications, and invalidate claims made to RHP.** Contact your local Real Fyre dealer if you need more information.

**This product is only warranted when used as part of a Robert H. Peterson Co. vented burner system.**

**WARNING: This gas log set is for use with R.H. Peterson Co. burners (and parts) ONLY.**

**CAUTION: Burn hazard! Logs will remain hot for some time after use.**  
If you need to reposition any log to maintain the proper layout, use heat resistant gloves or allow logs adequate time to cool before handling.

Failure to use Peterson burners and valves may result in a **DANGEROUS** situation and in property damage, personal injury or even death; will void listings and certifications; and will void any insurance coverage by R.H. Peterson Co. or our insurers.


# CHESTNUT OAK LOG SET PLACEMENT INSTRUCTIONS (18" MODELS)

## CN-18 PARTS LIST


④ CNL-14TY



⑤  
CNL-13TY




③  
CNL-14T



① SDPL-15BR



② CNL-18BF




**CAUTION: Burn hazard! Logs will remain hot for some time after use.**

All items for this log set are included in one (1) box.


I




II

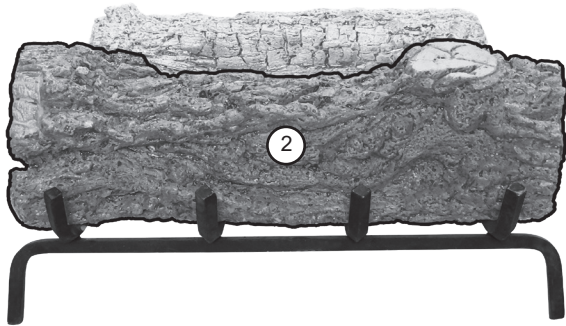

III

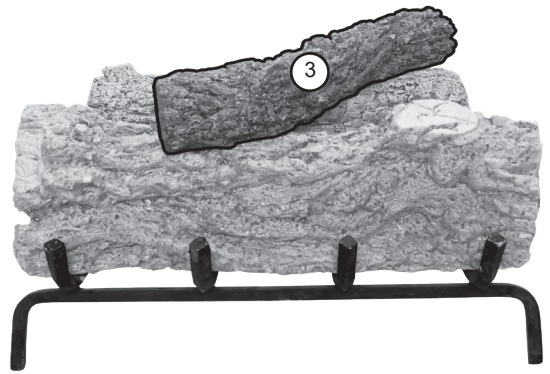


IV

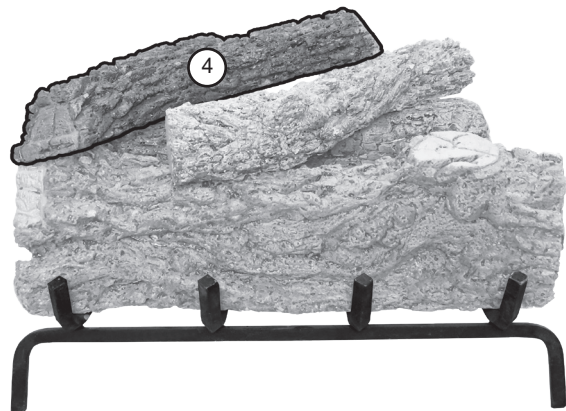


Final Log Placement

V

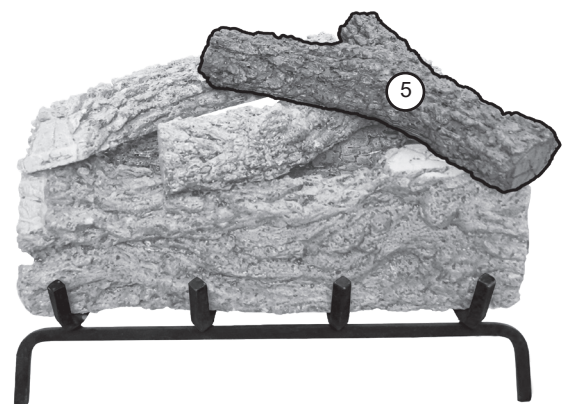






# CHESTNUT OAK LOG SET PLACEMENT INSTRUCTIONS (24" MODEL)

## CN-24 PARTS LIST

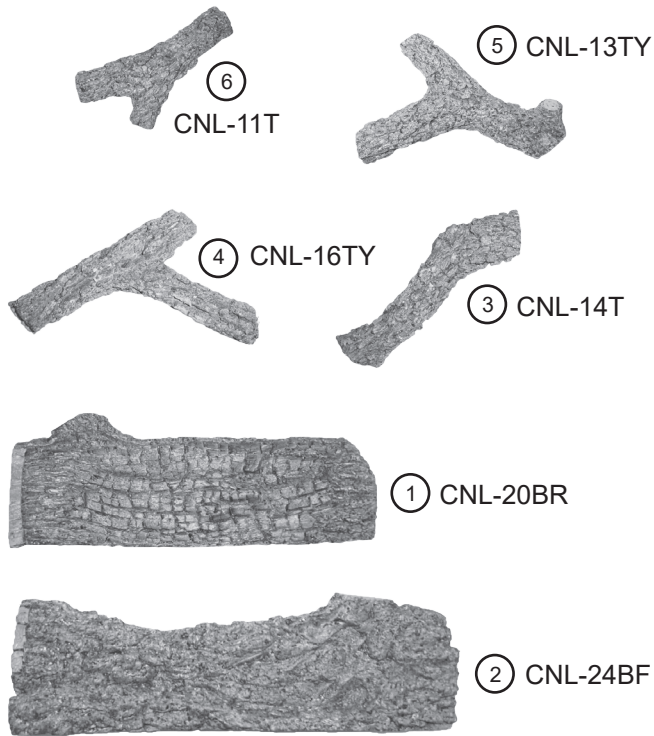


**CAUTION: Burn hazard! Logs will remain hot for some time after use.**

All items for this log set are included in one (1) box.

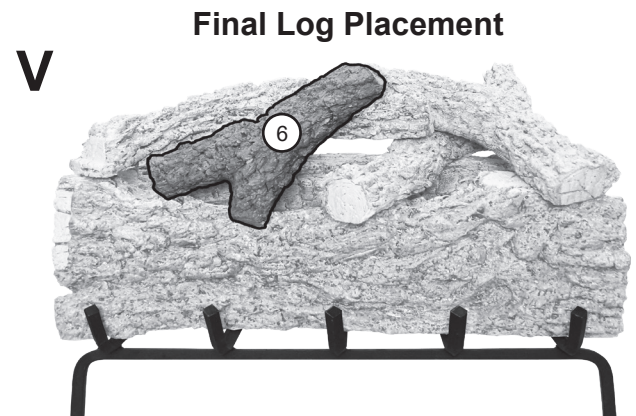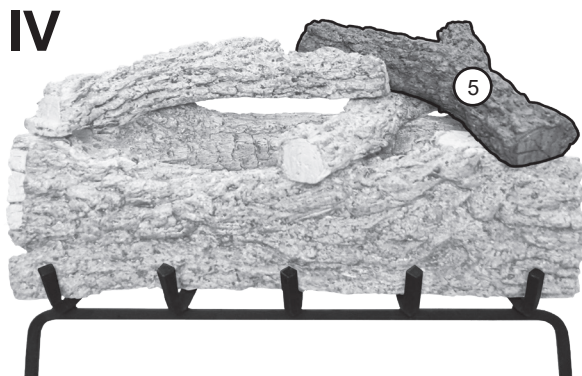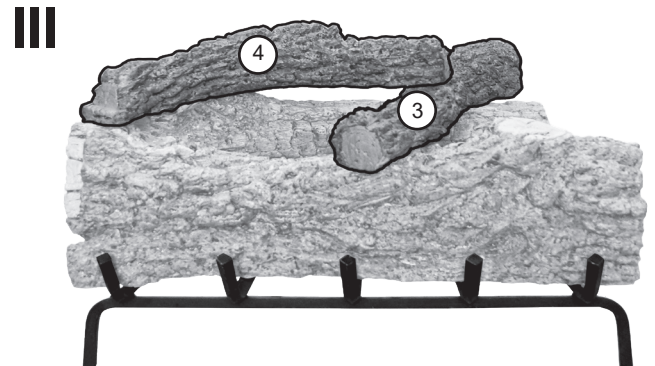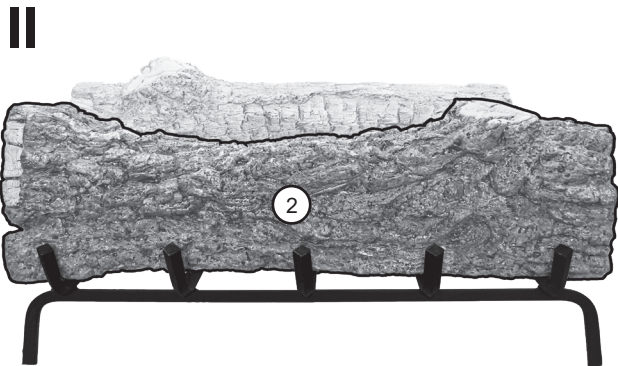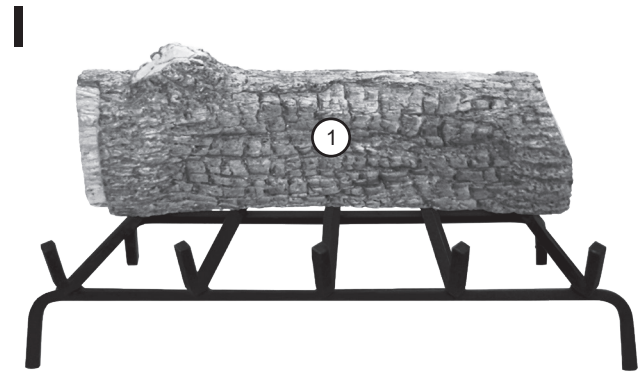

# CHESTNUT OAK LOG SET PLACEMENT INSTRUCTIONS (30" MODEL)


## CN-30 PARTS LIST

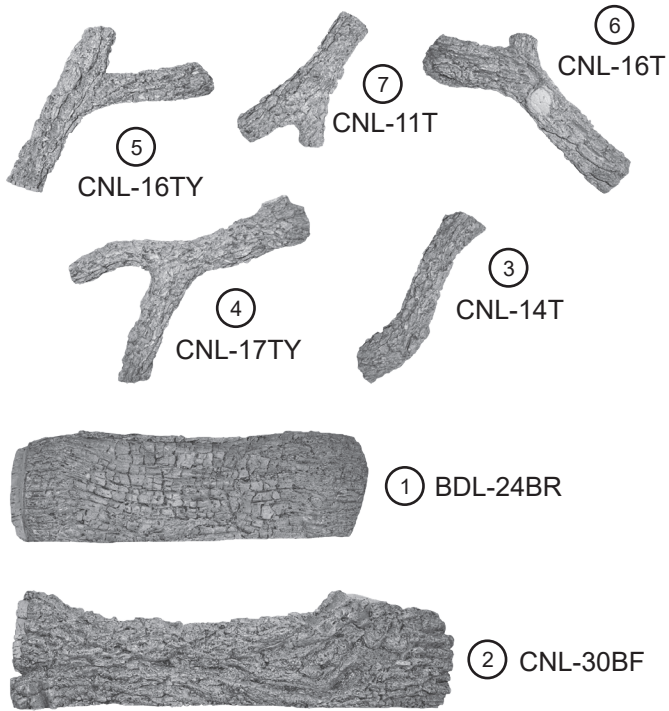


**CAUTION: Burn hazard! Logs will remain hot for some time after use.**

2 Boxes	Items
CN-30B	BDL-24BR, CNL-30BF
CN-30T	CNL-11T, CNL-14T, CNL-16T, CNL-16TY, CNL-17TY


I

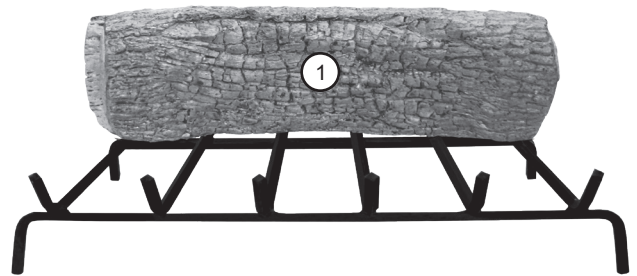


II

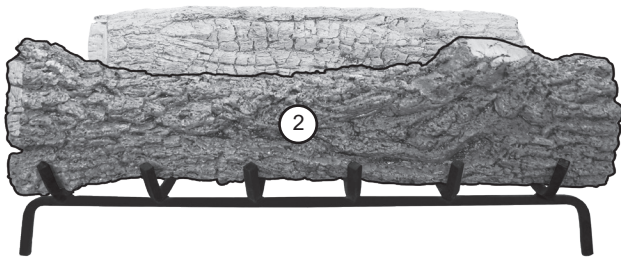

III

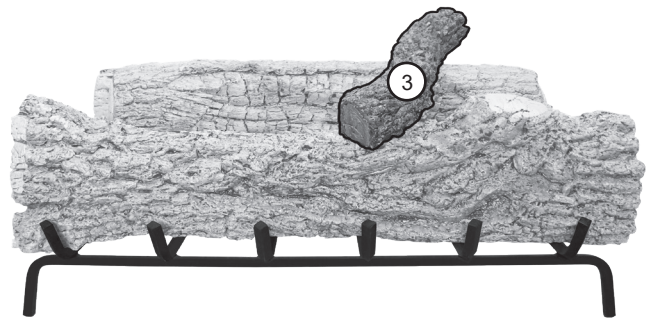


IV

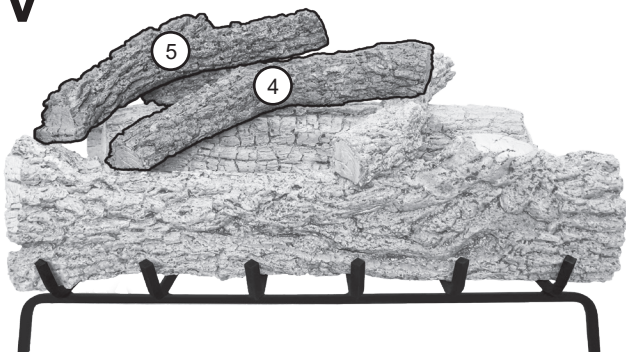


Final Log Placement

V

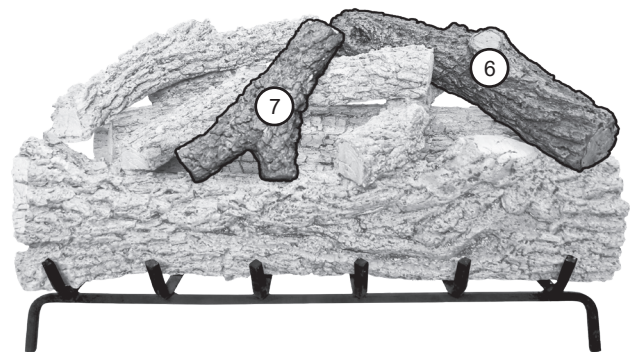

# CHESTNUT OAK LOG SET PLACEMENT INSTRUCTIONS (36" MODEL)


## CN-36 PARTS LIST

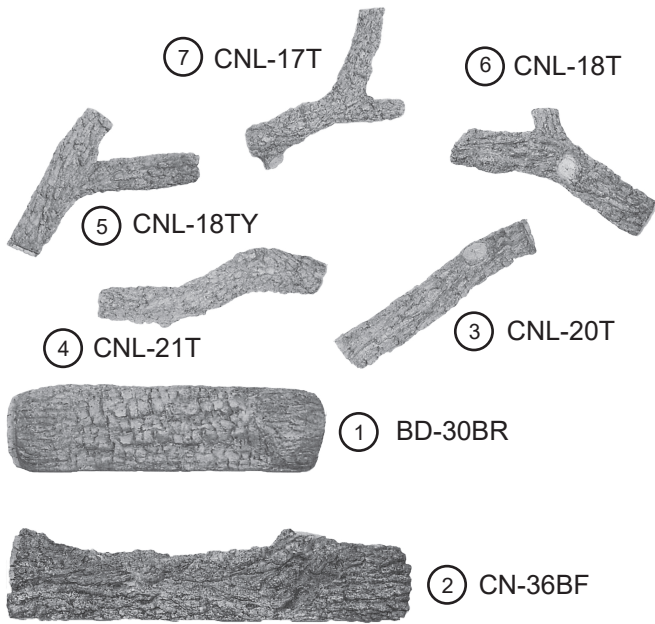


**CAUTION: Burn hazard! Logs will remain hot for some time after use.**

3 Boxes	Items
CN-36BF	CN-36BF
BD-30BR	BD-30BR
CN-36T	CNL-17T, CNL-18T, CNL-18TY, CNL-20T, CNL-21T


I

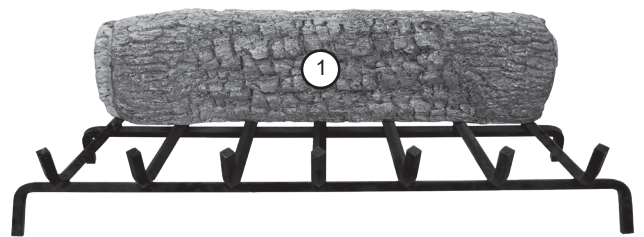

II

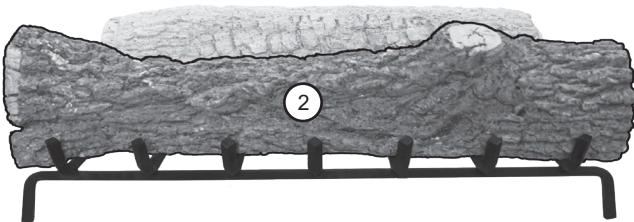

III

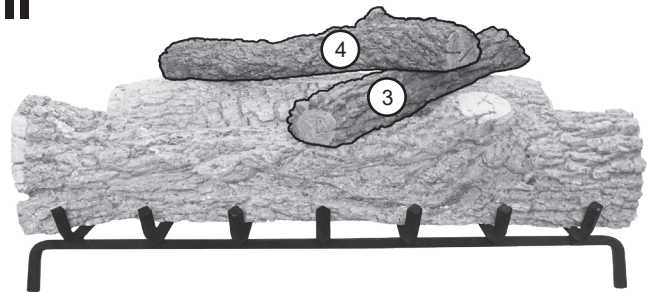

IV



V

**Final Log Placement**

